


POWDER INDUCTION PRODUCTS

Four ways to induce powder in-line



PM Powder Mixer

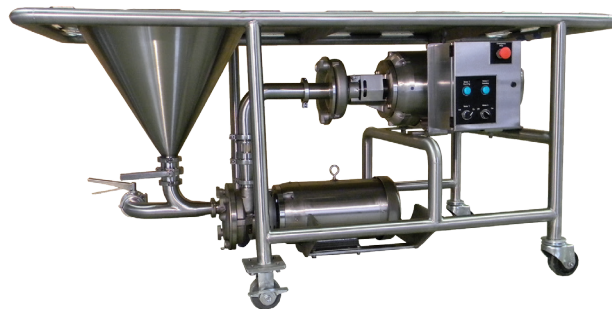

AC+ Dry Blender System



SBI System



PI System



Specification	SBI System	PM Powder Mixer	AC+ Dry Blender	PI System
Ideal operating flow rate (low viscosity)	50 – 525 GPM 11 – 119 m ³ /hr	30 – 200GPM 7 – 45 m ³ /hr	40 – 130 GPM 9 – 30 m ³ /hr	30 – 200 GPM 7 – 45 m ³ /hr
Powder feed rates (highly soluble)	Up to 200#/min 91 kg/min	Up to 325#/min 147 kg/min	Up to 350#/min 159 kg/min	Up to 325#/min 147 kg/min
Maximum viscosity	1000 cPs	2500 cPs*	2500 cPs*	2500 cPs*
Dynamic shearing teeth	Yes	Yes	No	No

* May require a supply or take-away pump